




# Polycast<sup>®</sup> UV-SC UV Blocking & Solar Heat Control Cell Cast Acrylic Sheet

## Performance Characteristics & Comparisons

Polycast<sup>®</sup> UV-SC is a custom cell cast acrylic sheet solution that blocks out significant amounts of near-infrared (NIR) radiation while maintaining high visible light transmission. This aircraft-quality monolithic glazing material can be manufactured to MIL-PRF 5425, 8184 and 25690; DTD-5592; L-P-391; ASTM D-4802 and other specifications. It is available in a wide range of colors and light transmissions, including Night Vision Compatibility (NVG).

### SOLAR ENERGY VS. VISIBLE LIGHT TRANSMISSION

The graph below depicts the typical relationship between solar energy transmission and visible light transmission when using traditional colors versus Polycast UV-SC colors.

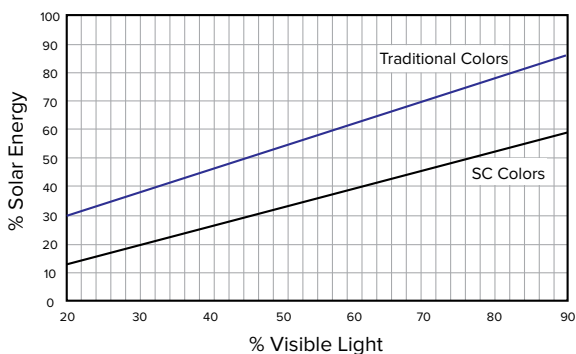


**Note:** Both Polycast UV-SC materials transmit high amounts of visible light (400 to 700 nm) and transmit much less radiation in the near-infrared (NIR) and in the UV. The NIR and UV regions contain significant amounts of solar energy, but do not contribute to visibility.


### SPECTRAL TRANSMISSION COMPARISONS OF GLAZING MATERIALS

These two graphs illustrate the type of radiation allowed to pass through two different glazing materials. Graph A compares standard clear acrylic with Polycast<sup>®</sup> 83SC while Graph B shows differences between traditional 2515 and SC15 Gray.

83SC vs. Clear Acrylic

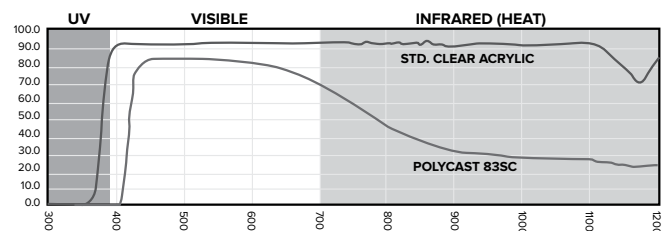

2515 vs. SC15

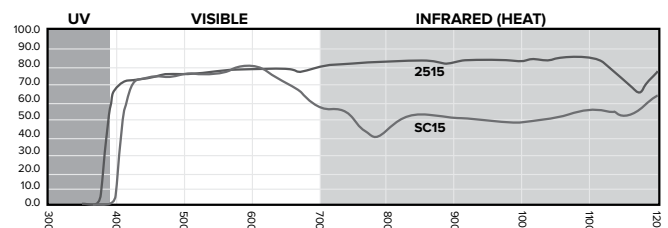

**HEAT REDUCTION COMPARISONS BY COLOR**

The following tables show examples of the heat reduction advantages of Polycast UV-SC colors compared with traditional materials. All SC colors reduce UV damage by at least 98%. This typical data is not intended to be used for specification purposes..



**UV-SC COLOR EXAMPLES**

COLOR	% VISIBLE LIGHT	% SOLAR ENERGY**	% ENERGY REDUCTION
Clear Acrylic 82SC*	92 82	85 53	15 47
2111 Green SC111 Green*	77 72	75 45	25 55
2515 Gray 2515 Gray*	76 72	74 51	26 49
2540 Bronze SC40 Bronze*	75 71	72 47	28 53
2256 Gray SC56 Gray*	65 65	66 47	34 53
2094 Gray SC94 Gray*	45 45	49 38	51 62
2537 Gray SC37 Gray*	32 32	41 27	59 73
2412 Bronze SC112 Bronze*	27 27	35 26	65 74
2064 Gray SC64 Gray*	26 26	34 24	66 76
2130 Green SC30 Green*	23 24	40 21	60 79
2538 Gray SC38 Gray*	16 15	26 15	74 85
2074 Gray SC74 Gray*	13 13	23 13	77 87
2370 Bronze SC70 Bronze*	10 10	16 13	84 87

\*\* Indicates special solar control properties. Colors not listed are available upon request. UV-SC colors are available in a wide range of light transmissions.  
\*\* Solar Energy calculated using Lawrence Berkeley National Laboratory Optics v.5 software. The actual temperature in service will be dependent on the combination of many factors, such as weather conditions (including wind velocity) and type of application.

**NVG COMPATIBLE COLORS**

COLOR	DESCRIPTION	RELATIVE HEAT GAIN (BTU/HR X FT²)	% T SOLAR	% VLT	%T <sub>NVG</sub>	R (VLT/T SOLAR)
Gold Coat	Gold Coating Standard	—	—	—	72	—
NV73	Copper	173	57	73	75	1.3
NV83	Near Clear	174	60	83	73	1.4
NV72	Light Gray	173	59	73	73	1.2